



सत्यमेव जयते

File No: EC/SEIAA/2025-26/3815/2025

Government of India

Ministry of Environment, Forest and Climate Change

(Issued by the State Environment Impact Assessment
Authority(SEIAA), JHARKHAND)



Dated: 25/11/2025



To,

SUMIT KUMAR AGARWAL
DHATRE UDYOG LIMITED
ERGO TOWER, PLOT NO- A1-4, BLOCK EP & GP, UNIT NO 1406, 14TH FLOOR, KOLKATA,
WEST BENGAL, 700091
INFO@DHATRE.COM

Subject: Grant of EC under the provision of the EIA Notification 2006-regarding.

Sir/Madam,

This is in reference to your application for Grant of EC under the provision of the EIA Notification 2006-regarding in respect of project The Skyline submitted to Ministry vide proposal number SIA/JH/INFRA2/535335/2025 dated 18/06/2025.

2. The particulars of the proposal are as below:

(i) EC Identification No.	EC25C3801JH5205742N
(ii) File No.	EC/SEIAA/2025-26/3815/2025
(iii) Clearance Type	EC
(iv) Category	B2
(v) Project/Activity Included Schedule No.	8(a) Building / Construction
(vii) Name of Project	The Skyline
(viii) Name of Company/Organization	DHATRE UDYOG LIMITED
(ix) Location of Project (District, State)	RANCHI, JHARKHAND
(x) Issuing Authority	SEIAA
(xi) Applicability of General Conditions	no
(xii) Applicability of Specific Conditions	no

Plot/Survey Khasra Nos.: 814 , 794 , 795 , 858 , 815 , 817 , 818 , 816 , 864 , 863 , 795 , 819 , 867

3. In view of the particulars given in the Para 1 above, the project proposal interalia including Form-1(Part A and B) were submitted to the Ministry for an appraisal by the State Environment Impact Assessment Authority(SEIAA) Appraisal Committee (SEIAA) in the Ministry under the provision of EIA notification 2006 and its subsequent amendments.

4. The above-mentioned proposal has been considered by State Environment Impact Assessment Authority (SEIAA) Appraisal Committee of SEIAA in the meeting held on 04/11/2025. The minutes of the meeting and all the Application and documents submitted [(viz. Form-1 Part A, Part B, Part C EIA, EMP)] are available on PARIVESH portal which can be accessed by scanning the QR Code above.
5. The brief about configuration of plant/equipment, products and byproducts and salient features of the project along with environment settings, as submitted by the Project proponent in Form-1 (Part A, B and C)/EIA & EMP Reports/presented during SEIAA are annexed to this EC as Annexure (1).
6. The SEIAA, in its meeting held on 04/11/2025, based on information & clarifications provided by the project proponent and after detailed deliberations recommended the proposal for grant of EC under the provision of EIA Notification, 2006 and as amended thereof subject to stipulation of specific and general conditions as detailed in Annexure (2).
7. The SEIAA has examined the proposal in accordance with the Environment Impact Assessment (EIA) Notification, 2006 & further amendments thereto and after accepting the recommendations of the State Environment Impact Assessment Authority (SEIAA) Appraisal Committee hereby decided to grant EC for instant proposal of M/s. SUMIT KUMAR AGARWAL under the provisions of EIA Notification, 2006 and as amended thereof.
8. The Ministry reserves the right to stipulate additional conditions, if found necessary.
9. The EC to the aforementioned project is under provisions of EIA Notification, 2006. It does not tantamount to approvals/consent/permissions etc. required to be obtained under any other Act/Rule/regulation. The Project Proponent is under obligation to obtain approvals /clearances under any other Acts/ Regulations or Statutes, as applicable, to the project.
10. This issues with the approval of the Competent Authority.

Copy To

N/A

Annexure 1

Standard EC Conditions for (Building / Construction)

1. Statutory Compliance

S. No	EC Conditions
1.1	The project proponent shall obtain all necessary clearance/ permission from all relevant agencies including town planning authority before commencement of work. All the construction shall be done in accordance with the local building byelaws.
1.2	The approval of the Competent Authority shall be obtained for structural safety of buildings due to earthquakes, adequacy of firefighting equipment etc. as per National Building Code including protection measures from lightening etc.
1.3	The project proponent shall obtain forest clearance under the provisions of Forest (Conservation) Act, 1980, in case of the diversion of forest land for non-forest purpose involved in the project.
1.4	The project proponent shall obtain clearance from the National Board for Wildlife, if applicable.
1.5	The project proponent shall obtain Consent to Establish / Operate under the provisions of Air (Prevention & Control of Pollution) Act, 1981 and the Water (Prevention & Control of Pollution)

S. No	EC Conditions
	Act, 1974 from the concerned State Pollution Control Board/ Committee.


Additional EC Conditions


N/A

Annexure 2

Details of Products & By-products

Name of the product /By-product	Product / By-product	Quantity	Unit	Mode of Transport / Transmission	Remarks (eg. CAS number)
Building Construction	Building Construction	44747.89	Built-Up Area : 44747.89 Sq.m.	Road	Total Residential Units are 317 including 2 BHK : 132 & 3 BHK : 185

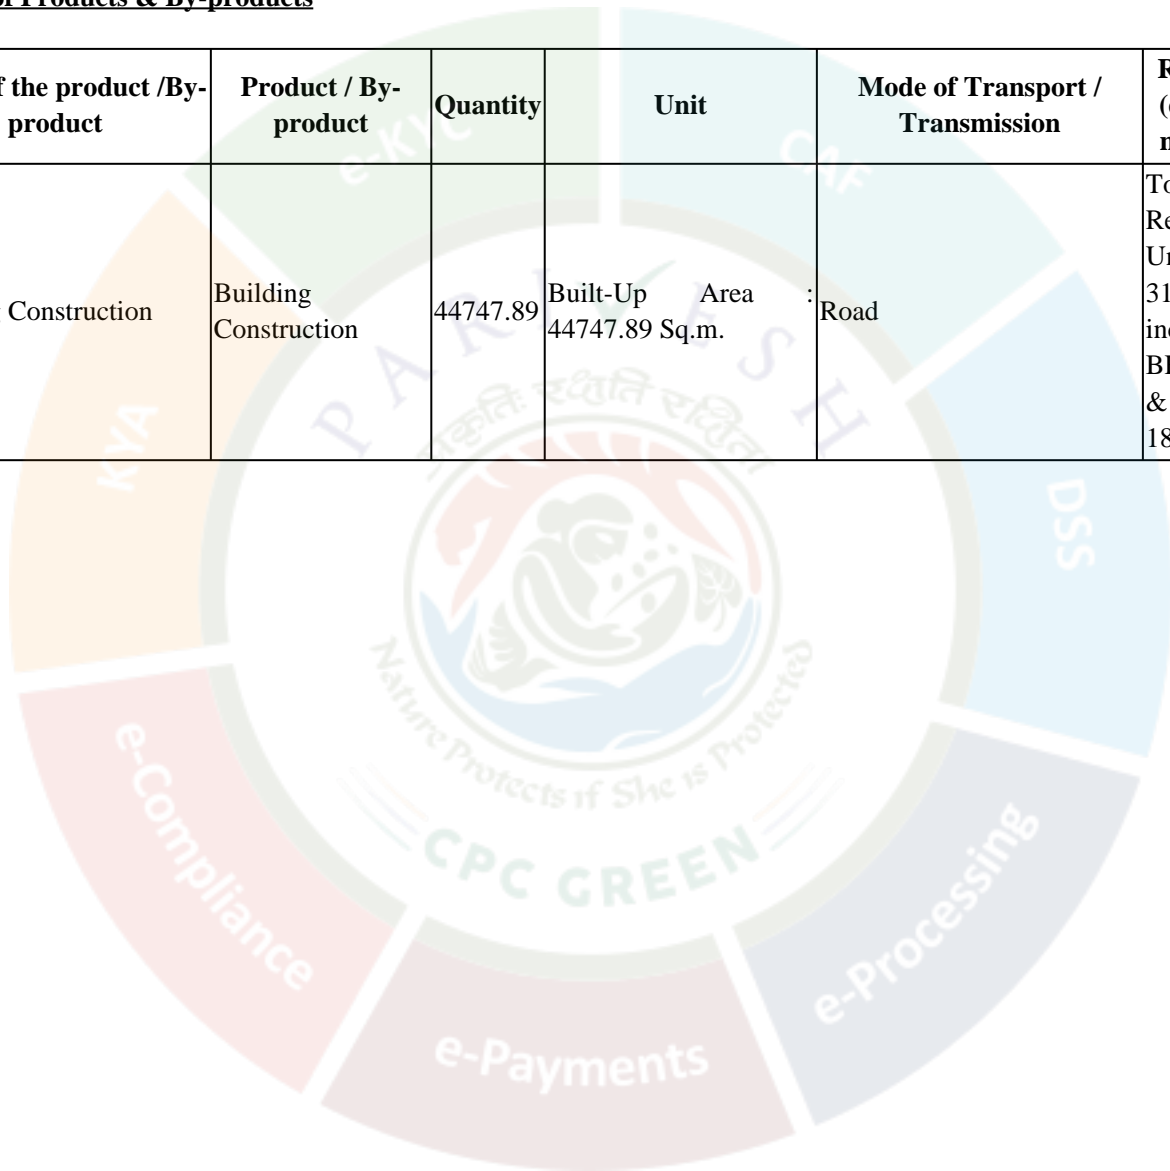



सत्यमेव जयते

State Level Environment Impact Assessment Authority, Jharkhand

Nursery Complex, Near Dhurwa Bus Stand, Dhurwa, Ranchi. Jharkhand-834 004

E-mail: mseiaa.jhk@gmail.com / website: www.jseiaa.in

Letter No. : EC/SEIAA/2025-26/3815/2025/

Ranchi, Date :

**To: Shri Sumit Kumar Agarwal,
Managing Director,
ERGO Tower, Plot No. : A1 – 4, Block – EP & GP,
Unit No. - 1406, 14th Floor, Sector - V,
Salt Lake City, Kolkata : 700091.**

**Sub. : Environmental Clearance for the project “Proposed Residential Complex namely
“The Skyline” of Dhatre Udyog Limited at Village : Dindli, Tehsil : Gamharia,
District : Saraikela - Kharsawan, Jharkhand” (Proposal No. :
SIA/JH/INFRA2/535335/2025) – regarding.**

Ref. : Your application no. Nil, dated – 14.08.2025.

It is in reference to the project “Proposed Residential Complex namely “The Skyline” of Dhatre Udyog Limited at Village : Dindli, Tehsil : Gamharia, District : Saraikela - Kharsawan, Jharkhand” submitted by you for seeking prior Environmental Clearances (EC).

This is a new project which has been taken for appraisal on 09.10.2025.

**Project Sector: 8(a) Building and Construction Projects , Category: B2.
Application for Environment Clearance (EC) as per EIA notification, 2006.**

A copy of a complaint dated 14.05.2025 from a group of persons addressed to the Municipal Commissioner, Adityapur Municipal Corporation, Adityapur, Jharkhand regarding the siting of the project has been received by SEIAA 26.05.2025.

Accordingly, the Member Secretary, SEAC vide letter no. 17, dated 07.08.2025 to Municipal Commissioner, Adityapur Municipal Corporation, Adityapur, Jharkhand alongwith the copy of the complaint received to provide his opinion on the contents of the complaints.

The Municipal Commissioner, Adityapur Municipal Corporation (AMC) vide letter no. 3371 dated 11.09.2025 provided his reply as follows :

"As per the Jharkhand Building Construction Certification 2016 and the Jamshedpur Urban Master Plan, all necessary Certificates/Clearances (such as Fire Safety, Housing Board, Airport, Departmental certificates, etc., including required No Objection Certificates) have been obtained, and after complying with the regulations, the building plan has sanctioned."

SP

SP

SP

Particular	Details
Project Name	The Skyline
Proponent	Dhatre Udyog Limited formerly known as Narayani Steel Limited
Type of Building	Residential
Coordinate	22°46'48.98"N- 86° 8'46.83"E
Mauza	Dindli
Tehsil	Gamharia
District	Saraikela – Kharsawan
State	Jharkhand
Ground Coverage Permissible	35%
Ground Coverage Consume	25.33% (i.e. 2900.38 Sq.m.)
FAR Permissible	3.00
FAR Consume	2.99
Plot Area	11451.13 Sq. m.
Total Built-Up Area	44707.68 Sq. m.
No. of Floor	B+G+12
No. of Building Block	3 <ul style="list-style-type: none"> ✓ Residential Block (A) ✓ Residential Block (B) ✓ Residential Block (C)
Building Configuration	2 BHK : 132 3 BHK : 185 <i>Total Residential Units are 317</i>
Municipal Solid Waste	1168.20 Kg / Day including Bio-degradable (40% of MSW) : 467.28 Kg / Day & Non-Biodegradable (60% of MSW) : 700.92 Kg / Day
Population	1947 <i>including floating population</i>
Parking	323 Car Parking for Flat Owners 33 Car Parking for Visitors 369 Two-Wheelers
Power Requirement	1.73 MVA (conventional)
Energy Saving	27.58 %
Power Back-up	1000 KVA
Renewal Energy	2 %
RWH Pits	3
Total Water Demand	224.44 KLD
Total Fresh Water Demand	136.29 KLD
Total Treated Water Demand	88.15 KLD
Treated Water discharge into Municipal Drain	53.60 KLD
Volume of Waste	177.18 KLD

Water		
Capacity of STP	200.00 KLD	
Project Cost	Rs. 76,35,37,219.00	(Rs. 76.35 Cr.)

LAND DETAILS

New Khata no. & Plot no. :

Khata no.	Plot no.
46, 196, 198, 173, 163, 55	814, 794, 795, 858, 815, 817, 818, 816, 864, 863, 795, 819, 867

Old Khata no. & Plot no.:

Khata no.	Plot no.
41, 62, 256, 40, 61	470, 472, 467, 466, 469, 513, 515, 471, 473, 474, 514, 475

Statutory Clearances :

1	Land Docs	:	Own land : Dhatre Udyog Limited
2	DFO Territorial	:	DFO, Saraikela Forest Division vide letter no. 352, dated 11.02.2025 certified that the distance of reserved / protected forest is less than 250 meters from project site.
3	DFO Wildlife	:	DFO, Dalma Elephant Project vide letter no. 3661, dated 26.09.2024 certified that proposed project site is out side Eco Sensitive Zone of Dalma Wildlife Sanctuary.
4	CO certificate	:	The CO, Gamharia vide letter no. 612, dated 08.05.2025 and letter no. 938, dated 31.08.2024 has mentioned the plot no. of the project is not recorded as "Jangle Jhari" in R.S. Khatiyani & Register II.
5	AAI NOC	:	Airport authority of India issued NOC vide NOC ID no. JAMS /EAST /B/ 082723/780948, dated 21.09.2023 valid up to 20.09.2031.
6	Building Plan approval	:	Building plan approved by Adityapur Municipal Corporation vide memo no. AMC/GH/0067/W21/2023, dated 16.10.2023.
7	Fire Department	:	Fire Advisory has been issued by Fire Officer Incharge, Adityapur vide memo no. 261/31/2023, dated 18.07.2023.

MAA

R
I

SP

Connectivity & Environment Sensitivity Area

Highway	Nearest Highway is Tata – Kandra Road which is 1.22 Km to the project site.
Railway	Nearest Railway is Adityapur Railway Station, which is about 1.34 Km.
Airport	Nearest Airport is Birsa Munda Airport which is about 103 Km.
ESZ	Dalma Wildlife Sanctuary (14 Km)
Waterbody	Kharkhai River (1.30 Km) Sitarampur Dam (3.90 Km) Subarnrekha River (6.68 Km) Dimna Lake (13.45)
Forest	Kandarbery Forest (9.34 Km) Ukam Hill Forest (7.50 Km)
Defense Installation	Not within 15 Km
Social Infrastructure	National Institute of Technology, Jamshedpur (0.15 Km) Shree Narayan Public School (1.00 Km) Adarsh High School Asangi (1.25 Km) S N High School Adityapur (1.78 Km) Ganga Ram Das Multispeciality Hospital Jamshedpur (1.24 Km) 111 SaveLife Hospital (1.69 Km) Magadh Samrat Hospital (2.50 Km) Meditrina Hospital (2.40 Km) P & M Mall (3.50 Km)

LAND USE OF PLOT AREA

	Unit Sq.m.	Percentage (%)
Total Plot Area	11451.13	
Ground Coverage	2900.38	25.33
Tree Covered Area	2390.00	20.87
Lawn / Garden Area	953.60	8.33
Open Parking	1345.50	11.75
Internal Road	3069	26.80
Open Space & Others	792.65	6.92
Total	11451.13	100.00

BUILT-UP AREA

Floor	Built-up Area A (Sq.m)	Built-up Area B (Sq.m)	Built-up Area C (Sq.m)	Total Built-up (Sq.m)
Basement	2,549.59	1,267.44	2,536.83	6,353.86
Ground	1,276.82	481.95	1,113.09	2,871.86

Floor	Built-up Area A (Sq.m)	Built-up Area B (Sq.m)	Built-up Area C (Sq.m)	Total Built-up (Sq.m)
1st Floor	1,200.44	562.48	1,193.91	2,956.83
2nd Floor	1,200.44	562.48	1,193.91	2,956.83
3rd Floor	1,200.44	562.48	1,193.91	2,956.83
4th Floor	1,200.44	562.48	1,193.91	2,956.83
5th Floor	1,200.44	562.48	1,193.91	2,956.83
6th Floor	1,200.44	562.48	1,193.91	2,956.83
7th Floor	1,200.44	562.48	1,193.91	2,956.83
8th Floor	1,200.44	562.48	1,193.91	2,956.83
9th Floor	1,200.44	562.48	1,193.91	2,956.83
10th Floor	1,200.44	562.48	1,193.91	2,956.83
11th Floor	1,200.44	562.48	1,193.91	2,956.83
12th Floor	1,200.44	562.48	1,193.91	2,956.83
Terrace	0.00	0.00	0.00	0.00
TOTAL	18,231.69	8,499.15	17,976.84	44,707.68

POPULATION ESTIMATION

Construction Phase : 150 labors will attend during construction phase.

Operation Stage

Building	As per Norms	DW Unit (Numbers)	Population
2 BHK	5 persons	132	660
3 BHK	6 persons	185	1110
Floating Population 10%			177
Total			1947

WATER DEMAND

During Construction Phase

Potable	: 4 KLD
Flushing	: 3 KLD
Construction work	: 100 KLD
Water Sprinkling	: 25 KLD
Total	: 132 KLD

Source – Municipal Water Supply / Municipal Tanker Supply / Ground Water

During Operational Phase

Population	Domestic @70L Per head	Flushing @35L per head
1947	136.29	68.15
Water Demand Total (UNIT : KLD)		
Domestic	136.29	
Flushing	68.15	
Horticulture	5.00	
Dust Suppression	5.00	
Car Washing	10.00	

Total Water Demand	224.44
<i>Total Fresh Water Demand</i> <i>Source : Municipal Water Supply / Municipal Tanker Supply / Ground Water</i>	136.29
<i>Total Treated Water Demand</i> <i>Source : Treated Water from Sewage Treatment Plant (STP)</i>	88.15

WASTE WATER MANAGEMENT

STP Calculation (KLD)			
Total Domestic Water	136.29	109.03	80% of Domestic Water is Waste Water
Total Flushing Water	68.15	68.15	100% of Flushing Water is Waste Water
Total Volume of Waste Water		177.18	STP Capacity 200.00
Waste Water Management (KLD)			
Loss 20 % loss on account of evaporation, loss in conveyance and processing.		35.44	
Volume of Treated Water from STP (i.e., 80% of Waste Water)		141.74	
Break-Up			
Flushing		68.15	
Dust Suppression		5.00	
Horticulture		5.00	
Car Washing		10.00	
Discharge to Municipal Drain		53.60	

Municipal Solid Waste Management during Construction Phase

Location	Municipal Solid Waste @0.2 Kg per Person per Day	Bio-degradable (40% of MSW)	Non-Biodegradable (60% of MSW)
Working Site	30 Kg / Day	12 Kg / Day	18 Kg / Day

Municipal Solid Waste Management during Operational Phase

Building Type	Municipal Solid Waste	Bio-degradable (40% of MSW)	Non-Biodegradable (60% of MSW)
Residential Building @0.6 Kg per Person per Day	1168.20 Kg / Day	467.28 Kg / Day	700.92 Kg / Day

ntj

D
/

Sp

Solid Waste Management

Construction Phase

Solid Waste generated during construction phase would include top soil, brick bats, pieces of reinforcing roads, pieces of wood boards & waste of other construction material, cans of paints electrical wire, etc.

Top Soil would be separately stored at pre-defined location within the site & preserved for landscaping. Sub – Soil would be stored for reuse in road making, plinth filling, etc.

Brickbats wastes of concrete would also be stored for road construction, etc. Surplus C & D waste would be handed over to Municipal Solid Waste Management Facility. E-Waste & Hazardous waste (cans of paints_ would be collected in separates containers. Recyclable wastes including bags, packing, pcs of steel rods sold to rag pickers.

Operational Phase

Estimated quantity of municipal solid waste Community building & residential building.

During operational phase of buildings municipal solid waste would be generated. They would be stored in different colour bins.

- ✓ Recyclable Waste - Blue
- ✓ Non-Biodegradable Waste - Black
- ✓ Bio-Degradable Waste - Green
- ✓ E-Waste - Yellow
- ✓ Hazardous Waste - Red

Recyclable Wastes would be handed to rag pickers.

Bio-Degradable Waste would be treated in OWC and the product will be utilize as fertilizer.

E-Waste & Hazardous Wastes would be handed over to authorized recyclers.

Rainwater Harvesting cum Recharge Pit

3 Rainwater Harvesting pits are proposed. Rain water from roof tops will be drained through rain water vertical down take pipes. These vertical down take pipes shall be located at suitable locations inside the shafts or periphery of the building. The terrace will be sloped. The down take pipes will be connected to the storm water network and then to Rainwater Harvesting Pits.

Catchment Area (m2)	Runoff Coefficient	Intensity of Rainfall in 24 hr. (mm)	Maximum Intensity of Rainfall hourly (mm/hr)	Retention Time - Runoff (m3/15 mins)	Runoff minutes
3012.34	0.85	180	9	5.76	23.04
Volume of desilting Tank (m3)	Volume of Recharge Pit (m3 Per pit)	Total Volume (m3)	Runoff minutes	No. of pits required	No. of pits proposed
4.5	3.375	7.875	23.04	2.93	3

6/11

b
/

SP

ENERGY DEMAND, CONSERVATION & GENERATION

Category	Conventional Demand (A)	Energy Saving (B)	% of Energy Saving	Net Demand (C = A - B)	Energy Conservation Measures
DW Unit (2 BHK: 132, 3 BHK: 185)	12913992.00	2808793.26	21.75%	10105198.74	Average overall energy saving of 21.75% by using LED Lighting, Star-rated Appliances (Fans, AC, Fridge), etc.
Pumps (10 kW)	21900.00	3285.00	15.00%	18615.00	An IE3/IE4 motor or VFD-driven system & Expected energy saving: ~15–20%
STP (250 KLD)	146000.00	21900.00	15.00%	124100.00	STP Standard motors IE3/IE4 (efficient) ~15%
OWC (500 Kg/Day)	237250.00	35587.50	15.00%	201662.50	OWC Standard motors Energy-optimized systems ~15%
External/Common Area Lighting	145448.85	87269.31	60.00%	58179.54	If we replace conventional lights with energy-efficient LED fixtures + sensors, we can expect 60–80% savings.
6 Number of Lifts	135780.00	52560.00	38.71%	83220.00	Regenerative lifts consume ~30–40% less energy than conventional

					lifts.
TOTAL	13600370.85	3750521.62	27.58%	9849849.23	

Total Energy Saving : 27.58% of the Conventional Demand
Total Energy Generation : 2% of the Net Demand

Energy Conservation Measures

- ✓ Replacing 2 x 13W Down lighter in lift lobby with 17W LED.
- ✓ Replacing T5 Tubelight in staircase with 20W LED.
- ✓ Replacing 70W MHL Street lights with 40W LED.
- ✓ Providing Street lights & common lighting on **SOLAR**.
- ✓ Replacing normal lighting with LED for Landscape.
- ✓ Using Variable Frequency Drive (VFD) for Lift machines, we can save 10% of consumption.
- ✓ By using Regenerative type lifts, we can save 30% of Consumption.
- ✓ By using Energy efficient motors, we can save 10% of energy.

Energy Demand Conversion

The total energy demand is 13600370.85 kWh per year.

Energy Performance Index (EPI) = Annual energy demand (kWh/Year) / Built-Up Area (m²)

$$= 13600370.85 / 44707.68 \text{ kWh/m}^2 / \text{year}$$

$$= 303.93 \text{ kWh/m}^2 / \text{Year}$$

Measures to Minimize Energy Consumption

The measures to minimize energy consumption include:

Renewable energy = 2% of the total energy demand will be sourced from renewable energy.

Renewable energy = 2% × 9849849.23 = 196996.98 kWh/year (i.e. 540 kW per day)

4 kW Power generation per panel per day & 1 Solar Panel required 20 Sq.ft. area. Hence 135 Panel required & total area required for solar panel is 2,700 Sq.ft.

Energy conservation (27.58%): 27.58% reduction in total energy consumption through energy conservation measures.

Energy savings = 27.58% × 13600370.85 = 3750521.62 kWh/year

Total energy consumption after measures:

Adjusted energy demand = 13600370.85 – 3750521.62

= 9849849.23 kWh/year

New EPI After Energy Conservation and Renewable Energy

Now, we will recalculate the EPI after considering the energy conservation and renewable energy measures:

New EPI = Adjusted energy demand (kWh/ year) / Built-up Area (m²)

$$= 9849849.23 / 44707.68 \text{ kWh/m}^2 / \text{year} = 220.32 \text{ kWh/m}^2 / \text{year}$$

Total Energy Demand (Conventional)	13600370.85 kWh
------------------------------------	-----------------

Total Energy Conservation	3750521.62 kWh
Total Energy Generation	196996.98 kWh
Total Energy Required after conservation & generation	96,52,852.25 kWh
EPI (initial)	303.93
EPI (After applying energy conservation and renewable energy measures)	220.32

BUDGETARY PROVISION
Project Cost

Particulars	Amount (INR)
Construction Cost	71,12,14,589.00
Land	2,82,96,359.00
EMP	2,00,00,000.00
Statutory Clearance & Other	40,26,271.00
Total	76,35,37,219.00

EMP Cost

EMP COST FOR CONSTRUCTION PHASE			
S. No	Description	Capital Cost (Rs. Lakhs)	Recurring Cost (Rs. Lakhs / Annum)
1.	Construction Site to be enclosed with 3m high corrugated sheet	7.00	0.00
2.	Acoustic enclosure for DG Set	2.00	0.00
3.	Regular Water Sprinkling by the hired tankers	0.00	10.00
4.	Shed for storage of building material	3.00	0.00
5.	Temporary Septic Tank	2.00	0.00
6.	Drinking Water Facility	0.50	0.00
7.	Storm Water Drainage System	2.50	0.00
8.	Arrangement (HDPE Colored bins) for storage of MSW	0.50	0.00
9.	PPE for Worker & Health Care	0.50	0.00
10.	Miscellaneous	5.00	1.00
Sub- Total (A)		23.00	11.00

EMP COST FOR OPERATIONAL PHASE

S. No	Description	Capital Cost (Rs. Lakhs)	Recurring Cost (Rs. Lakhs / Annum)
1.	Air Pollution Control and Noise Pollution Control (including cost of landscaping and Green Belt)	10.00	2.00
2.	Waste Water Management including STP (Capacity : 200 KLD)	81.00	2.50

Signature

b
+

f

3.	Solid Waste Management including OWC (capacity : 500 Kg/ Day)	15.00	2.00
4.	3 Rain Water Collection & Recharge Pit	10.00	0.50
5.	Solar lighting, CFL & Solar Panel System	55.00	2.00
6.	Miscellaneous	6.00	0.00
Sub-Total (B)		177.00 lakhs	9.00 lakhs
Total (A+B)		200.00 Lakhs	20.00 Lakhs

PREVENTION FROM ADVERSE IMPACT OF NEARBY INDUSTRIES

1. Boundary Wall:

A 3-meter-high boundary wall constructed using hollow clay bricks will function as an effective noise barrier, capable of reducing noise levels by up to 50 dB.

2. Green Belt / Plantation:

Two to four rows of plantation will be developed along the boundary, which will act as a natural barrier against airborne dust and noise, thereby mitigating environmental pollution and improving the site's aesthetic and ecological value.

ENVIRONMENT MANAGEMENT PLAN (EMP)

DURING CONSTRUCTION PHASE

Likely to impact environment activities	Mitigation Measure
Site Clearance ➤ Tree Felling ➤ Dismantling of existing structure & disposal of C & D Waste ➤ Grading & Leveling of Site ➤ Removal of Top Soil	<ul style="list-style-type: none"> ✓ Preserve some of the existing trees. ✓ Water sprinkling on identified site. ✓ Store top soil at pre-determined identified site & preserved.
Construction of Labour Camp	Local Labors will be hire
Installation, commissioning, and operation of construction equipment & machineries	<ul style="list-style-type: none"> ✓ Regular maintenance of machineries to minimize generation of noxious gases and dust. To ensure that construction equipments are compliant to BIS Specification wherever applicable. ✓ Also that they comply to applicable standard for emission prescribed by regulators
Earthwork Soil excavation for foundation work construction activities	<ul style="list-style-type: none"> ✓ Use excavated soil for plinth filling or Road construction. ✓ Surplus soil to be used in own mines for plantation purpose.
Generation of Solid Waste	✓ Recyclable waste to be handed over to Rag Pickers.

Transport & Storage of construction materials	<ul style="list-style-type: none"> ✓ Trucks carrying fine materials to be covered with tarpaulins ✓ Trucks with Pollution under Control Certificate. ✓ Toe wall along the edge of soil / sand storage to be provided to arrest flow of material during monsoon. ✓ Temporary storage yard to be constructed for proper storage of construction materials.
Water Pollution	<ul style="list-style-type: none"> ✓ Sewage & Cess Pool is proposed to be constructed for labor. ✓ Drinking water facility to be provided. ✓ Collection of surface run-off from active construction area and channelize them to desiltation pond. Desilted water to be let off to natural drainage.
Hazardous Waste	<ul style="list-style-type: none"> ✓ Used oil from construction equipments will be collected in HDPE containers and handed over to authorized recyclers. ✓ Used cans of paints, varnished to be handed over to authorized recycler.
Noise Pollution (Noise generated by construction equipments)	<ul style="list-style-type: none"> ✓ Regular repair & maintenance of equipments. ✓ Providing acoustic barrier around periphery of construction site (3.5 m high GI Sheet). Boundary wall has already been constructed around the project area. ✓ DG set will be provided as per the norms of CPCB.
Environment Monitoring	Regular environment monitoring will be done covering noise, air & water quality, during half yearly EC Compliance.
Arrangement of Water for Construction	✓ Create water storage tank to store water procured through water tankers / ground water abstraction.

DURING OPERATIONAL PHASE

Attributes	Environmental Issues	Impact	Mitigation Measure
Air Environment	Movement of Vehicles along internal Road	Generation of dust & noxious gases	<ul style="list-style-type: none"> ✓ Water sprinkling on internal Roads. ✓ Create grass cover on open spaces. ✓ Internal Roads to be paved. ✓ Avenue Plantation ✓ Plantation along periphery of project premises. ✓ Enforce speed limit for vehicle within project area.
Noise Environment	Movement of Vehicles along	Noise	Ensure <ul style="list-style-type: none"> ✓ Restrict speed limit

	internal Road		to 20 KMPH. ✓ Enforce no Horn Zone.
Solid Management	Waste	Generation of Municipal Solid Waste	Unhygienic Condition
			<p>Collection of</p> <ul style="list-style-type: none"> ✓ Bio-Degradable Waste ✓ Recyclable Solid Waste ✓ Non-Recyclable Solid Waste ✓ Hazardous Waste <p>Into a colored bin.</p> <p>Disposal</p> <ul style="list-style-type: none"> ✓ Recyclable waste to be handed over to rag pickers. ✓ Bio-Degradable & Non-Recyclable solid waste to be converted into fertilizer through OWC. <p>Hazardous waste to be handed to authorized hazardous Waste Management Facility.</p>
		Generation of Sludge from STP	Unhygienic Condition
Water Environment		Generation of Sewage	Waste Water
		Storm Water	Surface run-off may carry suspended solid during monsoon
		Roof rainwater harvesting system	Loss of rainwater
			<ul style="list-style-type: none"> ✓ Provision of STP for treatment of waste water & recycling ✓ Provide a network of storm water drains terminating into desiltation tank. This tank would be connected to storm water drainage system. ✓ Provide rainwater harvesting system with drawdown pipes & harvesting pits.

ns


b
L

sp

Environmental Monitoring Plan

S. no	Monitoring Parameters	No. of Locations	Frequency of Monitoring
1	Ambient Air: Ambient Air Quality at appropriate location for PM10, PM2.5, SO2, NOx in the vicinity of the mine area. In the surrounding area covering project site only.	3 Stations	Half Yearly
2	Water: Surface water sample in the vicinity of the Project area.	2 Surface water 2 Ground water	Half Yearly
3	Noise: Day & Night level Noise Monitoring.	3 stations	Half Yearly
4	Soil: Soil Monitoring, Qualitative and quantitative testing/analysis to check the soil fertility, porosity, texture, water holding capacity, etc.	2 stations	Half Yearly

Organizational Chart during Construction Phase

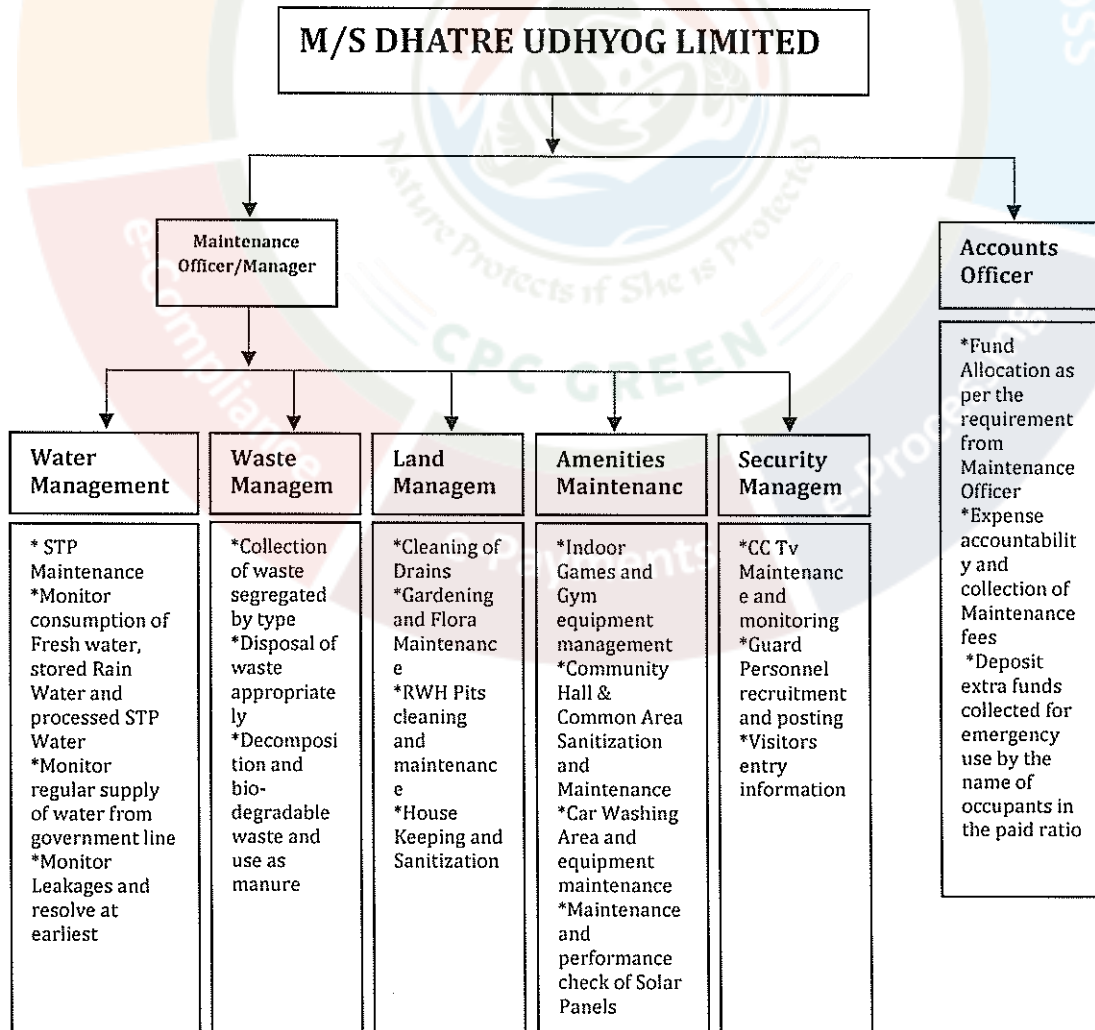

NOTE : Post construction management of premises will be handed over to RWA / Association / Society to be formed by the resident owners.

State Level Environment Level Impact Assessment Authority (SEIAA), Jharkhand in its 127th meeting held on 04th & 05th November, 2025 discussed the project proposal along with recommendations made by SEAC in its 127th meeting held on 09th, 10th, 11th, 12th and 13th October, 2025 and decided to grant EC to the project.

On the basis of recommendation of SEAC and decision of SEIAA to grant of EC, Environmental Clearance is hereby issued to the “Proposed Residential Complex namely “The Skyline” of Dhatre Udyog Limited at Village : Dindli, Tehsil : Gamharia, District : Saraikela - Kharsawan, Jharkhand” alongwith the following specific conditions as recommended by SEAC:

I. Specific Conditions:

- i. This Environmental Clearance is valid subject to the following condition below –
That this project has-
 - a. Obtained all legal rights to operate at concerned place.
 - b. Complied with all existing concerned laws of the land and
 - c. Complied with the decisions of SEIAA on the issue of Environmental Clearance till date.
- ii. In compliance of OM no.F.No. IA3-22/3/2024-IA.III (E-241594) dated 24.07.2024 of MoEF&CC, Govt. of India plantation of saplings shall be carried out in the earmarked green belt area as the part of tree plantation campaign “Ek Ped Ma Ke Naam” and the details of the same shall be uploaded in the MeriLiFE Portal (<https://merilife.nic.in>). 10% of the total green belt proposed shall be allocated under this clause.
- iii. PAs shall construct a 3-meter-high boundary wall using hollow clay bricks alongwith thick plantation of minimum 3 rows as an effective noise barrier on side facing industrial area.
- iv. Two to four rows of plantation will be developed along the boundary, as a natural barrier against airborne dust and noise.
- v. Ground water to be drawn for use in the project only after obtaining permission from the Competent Authority.
- vi. Environment management system including organization structure to be drawn to ensure compliance of EC conditions stipulated based on principles of Continual Improvement and periodical management review.
- vii. All raw material to be stored only under covered shed.
- viii. PAs to offset (upto20%) consumption of conventional energy sources by promoting use of solar energy, passive energy utilization, optimum fenestration, shading effect and heat islands.







- ix. **Developers to promote solar energy generation such that it offsets not less than 02 % of connected load.**
- x. **Trees should be developed & maintained not less than 15% of project area.**
- xi. **Organic Waste Converter (OWC) to be installed of sufficient capacity such that all organic waste (bio degradable) generated is composted at source only.**
- xii. **Developers/Company to install STP of sufficient capacity such that all the sewer produced is treated and reused.**
- xiii. **Developers/Company to install Rain water harvesting structures such that all the roof top water runoff is collected and harvested including reuse on 100% basis.**
- xiv. **Developers/Company to conduct and submit carbon footprint and carbon sequestration study report including mitigation measures as a part of EC compliance.**
- xv. **Water runoff originating from open non constructed areas of project premises to be harvested /guided in such a way that it does not create water logging condition outside.**
- xvi. **Sufficient number of EV fast charging points to be installed.**
- xvii. **MSW Collection centre should be located in isolated and preferably unmanned area. Movement of the vehicle carrying waste should be under tarpaulin covered condition only. Route of vehicle should be such that it avoids residential areas as far as practical.**
- xviii. **ISO 14k EMS system standard to be followed for implementation of EMPs with MRM in place for feedback to Sr management.**
- xix. **Install the required STP, if project start functioning before commencing or functioning of CETP of Municipal Corporation.**
- xx. **This Environmental Clearance is granted subject to final outcome of Hon'ble Supreme Court of India, Hon'ble High Court, Hon'ble NGT, MoEF & CC and any other Court of Law, if any, as may be applicable to this project.**
- xxi. **Environmental clearance is subject to obtaining prior clearance from forestry and Wildlife angle including clearance from standing committee of NBWL, as may be applicable to this project (in case any fauna occurs / is found in the Project area or if the area involves forest land or Wildlife habitat i.e. core zone of elephant/tiger reserve etc. and or located with in 10 km. of protected area).**
- xxii. **The project proponent may apply simultaneously for forest and NBWL clearance, in order to complete the formalities without undue delay, which till process on their respective merits, no rights will vest in or accrue to them unless all clearance are obtained.**
- xxiii. **This Environmental Clearance shall be valid subject to the sustainable environmental management.**







II. Statutory Compliance :

- i. The project proponent shall obtain all necessary clearance/ permission from all relevant agencies including town planning authority before commencement of work. All the construction shall be done in accordance with the local building byelaws.
- ii. The approval of the Competent Authority shall be obtained for structural safety of buildings due to earthquakes, adequacy of fire fighting equipment etc as per National Building Code including protection measures from lightening etc.
- iii. The project proponent shall obtain forest clearance under the provisions of Forest (Conservation) Act, 1980, in case of the diversion of forest land for non-forest purpose involved in the project.
- iv. In the writ petition (Civil) no. 202/1995, T.N. Godaverman Thirumulpad vs union of India and ors. the Hon'ble Supreme Court passed an order dated 03.06.2022 " National Park or Wildlife Sanctuary must have an ESZ of minimum 01 km in which the activities prescribed and prescribed in the guidelines of 09th February, 2011 shall be strictly adhered to".
- v. The project proponent shall obtain clearance from the National Board for Wildlife, if applicable.
- vi. The project proponent shall obtain Consent to Establish / Operate under the provisions of Air (Prevention & Control of Pollution) Act, 1981 and the Water (Prevention & Control of Pollution) Act, 1974 from the concerned State Pollution Control Board/ Committee.
- vii. The project proponent shall obtain the necessary permission for drawl of ground water / surface water required for the project from the competent authority.
- viii. A certificate of adequacy of available power from the agency supplying power to the project along with the load allowed for the project should be obtained.
- ix. All other statutory clearances such as the approvals for storage of diesel from Chief Controller of Explosives, Fire Department, Civil Aviation Department shall be obtained, as applicable, by project proponents from the respective competent authorities.
- x. The provisions of the Solid Waste (Management) Rules, 2016, e-Waste (Management) Rules, 2016, and the Plastics Waste (Management) Rules, 2016 shall be followed.
- xi. The project proponent shall follow the ECBC/ECBC-R prescribed by Bureau of Energy Efficiency, Ministry of Power strictly.
- xii. Provision shall be made for the housing of construction labour within the site with all necessary infrastructure and facilities such as fuel (kerosene/gas) for cooking, safe drinking water, medical health care, etc. The housing may be in the form of temporary structures to be removed after completion of the project.
- xiii. Provision of drinking water, waste water disposal, solid wastes management and primary health facilities shall be ensured for labour force. Proper sanitation facilities

RAJ

b
/

SP

shall be provided at the construction site to prevent health related problems. Domestic as well as sanitary wastes from construction camps shall be cleared regularly.

- xiv. All the labourers to be engaged for construction works shall be screened for health and adequately treated before issue of work permits. The contractor shall ensure periodic health check-up of construction workers.
- xv. All vehicles/equipment deployed during construction phase shall be ensured in good working condition and shall conform to applicable air and noise emission standards. These shall be operated only during non-peaking hours.
- xvi. Accumulation/stagnation of water shall be avoided ensuring vector control.
- xvii. Water during construction phase should be preferred from Municipal supply.
- xviii. Unskilled construction labourers shall be recruited from the local areas.
- xix. Monitoring of ground water table and quality once in three months shall be carried out. Construction of tube wells, bore wells shall be strictly regulated.
- xx. Adequate provision shall be made to cater the parking needs. Parking spaces standards as given in "Manual on Norms and Standards for Environmental Clearance of Large Construction Projects" issued by Ministry of Environment and Forests, Government of India shall be adopted.
- xxi. Rest room facilities shall be provided for service population.
- xxii. Water body falling within premises (if any) shall not be lined or no embankment shall be cemented. The water bodies, if any, shall be kept in natural conditions without disturbing the ecological habitat.
- xxiii. Construction shall conform to the requirements of local seismic regulations. The project proponent shall obtain permission for the plans and designs including structural design, standards and specifications of all construction work from concerned authority.

III. Air quality monitoring and preservation:

- i. Notification GSR 94(E) dated 25.01.2018 of MoEF&CC regarding Mandatory Implementation of Dust Mitigation Measures for Construction and Demolition Activities for projects requiring Environmental Clearance shall be complied with.
- ii. A management plan shall be drawn up and implemented to contain the current exceedance in ambient air quality at the site.
- iii. The project proponent shall install system to carryout Ambient Air Quality monitoring for common/criterion parameters relevant to the main pollutants released (e.g. PM10 and PM25) covering upwind and downwind directions during the construction period.
- iv. Diesel power generating sets proposed as source of backup power should be of enclosed type and conform to rules made under the Environment (Protection) Act,

1986. The height of stack of DG sets should be equal to the height needed for the combined capacity of all proposed DG sets. Use of low sulphur diesel. The location of the DG sets may be decided with in consultation with State Pollution Control Board.

- v. Construction site shall be adequately barricaded before the construction begins. Dust, smoke & other air pollution prevention measures shall be provided for the building as well as the site. These measures shall include screens for the building under construction, continuous dust/ wind breaking walls all around the site (at least 3 meter height). Plastic/tarpaulin sheet covers shall be provided for vehicles bringing in sand, cement, murrum and other construction materials prone to causing dust pollution at the site as well as taking out debris from the site.
- vi. Sand, murrum, loose soil, cement, stored on site shall be covered adequately so as to prevent dust pollution.
- vii. Wet jet shall be provided for grinding and stone cutting.
- viii. Unpaved surfaces and loose soil shall be adequately sprinkled with water to suppress dust.
- ix. All construction and demolition debris shall be stored at the site (and not dumped on the roads or open spaces outside) before they are properly disposed. All demolition and construction waste shall be managed as per the provisions of the Construction and Demolition Waste Rules 2016.
- x. The diesel generator sets to be used during construction phase shall be low sulphur diesel type and shall conform to Environmental (Protection) prescribed for air and noise emission standards.
- xi. The gaseous emissions from DG set shall be dispersed through adequate stack height as per CPCB standards. Acoustic enclosure shall be provided to the DG sets to mitigate the noise pollution. Low sulphur diesel shall be used. The location of the DG set and exhaust pipe height shall be as per the provisions of the Central Pollution Control Board (CPCB) norms.
- xii. For indoor air quality the ventilation provisions as per National Building Code of India.

IV. Water quality monitoring and preservation:

- i. The natural drain system should be maintained for ensuring unrestricted flow of water. No construction shall be allowed to obstruct the natural drainage through the site, on wetland and water bodies. Check dams, bio-swales, landscape, and other sustainable urban drainage systems (SUDS) are allowed for maintaining the drainage pattern and to harvest rain water.
- ii. Buildings shall be designed to follow the natural topography as much as possible. Minimum cutting and filling should be done.
- iii. Total fresh water use shall not exceed the proposed requirement as provided in the project details.



- iv. The quantity of fresh water usage, water recycling and rainwater harvesting shall be measured and recorded to monitor the water balance as projected by the project proponent. The record shall be submitted to the Regional Office, MoEF&CC along with six monthly Monitoring reports.
- v. A certificate shall be obtained from the local body supplying water, specifying the total annual water availability with the local authority, the quantity of water already committed, the quantity of water allotted to the project under consideration and the balance water available. This should be specified separately for ground water and surface water sources, ensuring that there is no impact on other users.
- vi. At least 20% of the open spaces as required by the local building bye-laws shall be pervious. Use of Grass pavers, paver blocks with at least 50% opening, landscape etc. would be considered as pervious surface.
- vii. Installation of dual pipe plumbing for supplying fresh water for drinking, cooking and bathing etc and other for supply of recycled water for flushing, landscape irrigation, car washing, thermal cooling, conditioning etc. shall be done.
- viii. Use of water saving devices/ fixtures (viz. low flow flushing systems; use of low flow faucets tap aerators etc) for water conservation shall be incorporated in the building plan.
- ix. Separation of grey and black water should be done by the use of dual plumbing system. In case of single stack system separate recirculation lines for flushing by giving dual plumbing system be done.
- x. Water demand during construction should be reduced by use of pre-mixed concrete, curing agents and other best practices referred.
- xi. The local bye-law provisions on rain water harvesting should be followed. If local byelaw provision is not available, adequate provision for storage and recharge should be followed as per the Ministry of Urban Development Model Building Byelaws, 2016. Rain water harvesting recharge pits/storage tanks shall be provided for ground water recharging as per the CGWB norms.
- xii. A rain water harvesting plan needs to be designed where the recharge bores of minimum one recharge bore per 5,000 square meters of built up area and storage capacity of minimum one day of total fresh water requirement shall be provided. In areas where ground water recharge is not feasible, the rain water should be harvested and stored for reuse. The ground water shall not be withdrawn without approval from the Competent Authority.
- xiii. All recharge should be limited to shallow aquifer.
- xiv. No ground water shall be used during construction phase of the project.
- xv. Any ground water dewatering should be properly managed and shall conform to the approvals and the guidelines of the CGWA in the matter. Formal approval shall be taken from the CGWA for any ground water abstraction or dewatering.

NA

D
/

Sp

- xvi. The quantity of fresh water usage, water recycling and rainwater harvesting shall be measured and recorded to monitor the water balance as projected by the project proponent. The record shall be submitted to the Regional Office, MoEF&CC along with six monthly Monitoring reports.
- xvii. Sewage shall be treated in the STP with tertiary treatment. The treated effluent from STP shall be recycled/re-used for flushing, AC make up water and gardening. As proposed, no treated water shall be disposed in to municipal drain.
- xviii. No sewage or untreated effluent water would be discharged through storm water drains.
- xix. Onsite sewage treatment of capacity of treating 100% waste water to be installed based on the MBBR/MBR/SBR technology. The installation of the Sewage Treatment Plant (STP) shall be certified by an independent expert and a report in this regard shall be submitted to the Ministry before the project is commissioned for operation. Treated waste water shall be reused on site for landscape, flushing, cooling tower, and other end-uses. Excess treated water shall be discharged as per statutory norms notified by Ministry of Environment, Forest and Climate Change. Natural treatment systems shall be promoted.
- xx. Periodical monitoring of water quality of treated sewage shall be conducted. Necessary measures should be made to mitigate the odour problem from STP.
- xxi. Sludge from the onsite sewage treatment, including septic tanks, shall be collected, conveyed and disposed as per the Ministry of Urban Development, Central Public Health and Environmental Engineering Organization (CPHEEO) Manual on Sewerage and Sewage Treatment Systems, 2013.

V. Noise monitoring and prevention:

- i. Ambient noise levels shall conform to residential area/commercial area/industrial area/silence zone both during day and night as per Noise Pollution (Control and Regulation) Rules, 2000. Incremental pollution loads on the ambient air and noise quality shall be closely monitored during construction phase. Adequate measures shall be made to reduce ambient air and noise level during construction phase, so as to conform to the stipulated standards by CPCB / SPCB.
- ii. Noise level survey shall be carried as per the prescribed guidelines and report in this regard shall be submitted to Regional Officer of the Ministry as a part of six-monthly compliance report.
- iii. Acoustic enclosures for DG sets, noise barriers for ground-run bays, ear plugs for operating personnel shall be implemented as mitigation measures for noise impact due to ground sources.

VI. Energy Conservation measures:

- i. Compliance with the Energy Conservation Building Code (ECBC) of Bureau of Energy Efficiency shall be ensured. Buildings in the States which have notified their own ECBC, shall comply with the State ECBC.
- ii. Outdoor and common area lighting shall be LED.







- iii. Concept of passive solar design that minimize energy consumption in buildings by using design elements, such as building orientation, landscaping, efficient building envelope, appropriate fenestration, increased day lighting design and thermal mass etc. shall be incorporated in the building design. Wall, window, and roof u-values shall be as per ECBC specifications.
- iv. Energy conservation measures like installation of CFLs/ LED for the lighting the area outside the building should be integral part of the project design and should be in place before project commissioning.
- v. Solar, wind or other Renewable Energy shall be installed to meet electricity generation equivalent to 1% of the demand load or as per the state level/ local building bye-laws requirement, whichever is higher.
- vi. Solar power shall be used for lighting in the apartment to reduce the power load on grid. Separate electric meter shall be installed for solar power. Solar water heating shall be provided to meet 20% of the hot water demand of the commercial and institutional building or as per the requirement of the local building bye-laws, whichever is higher. Residential buildings are also recommended to meet its hot water demand from solar water heaters, as far as possible.

VII. Waste Management:

- i. A certificate from the competent authority handling municipal solid wastes, indicating the existing civic capacities of handling and their adequacy to cater to the M.S.W. generated from project shall be obtained.
- ii. Disposal of muck during construction phase shall not create any adverse effect on the neighboring communities and be disposed taking the necessary precautions for general safety and health aspects of people, only in approved sites with the approval of competent authority.
- iii. Separate wet and dry bins must be provided in each unit and at the ground level for facilitating segregation of waste. Solid waste shall be segregated into wet garbage and inert materials.
- iv. Organic waste compost/ Vermiculture pit/ Organic Waste Converter within the premises with a minimum capacity of 0.3 kg /person/day must be installed.
- v. All non-biodegradable waste shall be handed over to authorized recyclers for which a written tie up must be done with the authorized recyclers.
- vi. Any hazardous waste generated during construction phase, shall be disposed off as per applicable rules and norms with necessary approvals of the State Pollution Control Board.
- vii. Use of environment friendly materials in bricks, blocks and other construction materials, shall be required for at least 20% of the construction material quantity. These include Fly Ash bricks, hollow bricks, AACs, Fly Ash Lime Gypsum blocks, Compressed earth blocks, and other environment friendly materials.
- viii. Fly ash should be used as building material in the construction as per the provision of Fly Ash Notification of September, 1999 and amended as on 27th August, 2003 and 25th January, 2016. Ready mixed concrete must be used in building construction.







- ix. Any wastes from construction and demolition activities related thereto shall be managed so as to strictly conform to the Construction and Demolition Rules, 2016.
- x. Used CFLs and TFLs should be properly collected and disposed off/sent for recycling as per the prevailing guidelines/ rules of the regulatory authority to avoid mercury contamination.

VIII. Green Cover:

- i. No tree can be felled/transplant unless exigencies demand. Where absolutely necessary, tree felling shall be with prior permission from the concerned regulatory authority. Old trees should be retained based on girth and age regulations as may be prescribed by the Forest Department. Plantations to be ensured species (cut) to species (planted).
- ii. A minimum of 1 tree for every 80 sqm of land should be planted and maintained. The existing trees will be counted for this purpose. The landscape planning should include plantation of native species. The species with heavy foliage, broad leaves and wide canopy cover are desirable. Water intensive and/or invasive species should not be used for landscaping.
- iii. Where the trees need to be cut with prior permission from the concerned local Authority, compensatory plantation in the ratio of 1:10 (i.e. planting of 10 trees for every 1 tree that is cut) shall be done and maintained. Plantations to be ensured species (cut) to species (planted). Area for green belt development shall be provided as per the details provided in the project document.
- iv. Topsoil should be stripped to a depth of 20 cm from the areas proposed for buildings, roads, paved areas, and external services. It should be stockpiled appropriately in designated areas and reapplied during plantation of the proposed vegetation on site.

IX. Transport:

- i. A comprehensive mobility plan, as per MoUD best practices guidelines (URDPFI), shall be prepared to include motorized, non-motorized, public, and private networks. Road should be designed with due consideration for environment, and safety of users. The road system can be designed with these basic criteria.
 - a. Hierarchy of roads with proper segregation of vehicular and pedestrian traffic.
 - b. Traffic calming measures.
 - c. Proper design of entry and exit points.
 - d. Parking norms as per local regulation.
- ii. Vehicles hired for bringing construction material to the site should be in good condition and should have a pollution check certificate and should conform to applicable air and noise emission standards be operated only during non-peak hours.

SAJ

b
/

Sp

- iii. A detailed traffic management and traffic decongestion plan shall be drawn up to ensure that the current level of service of the roads within a 05 kms radius of the project is maintained and improved upon after the implementation of the project. This plan should be based on cumulative impact of all development and increased habitation being carried out or proposed to be carried out by the project or other agencies in this 05-Kms radius of the site in different scenarios of space and time and the traffic management plan shall be duly validated and certified by the State Urban Development department and the P.W.D./ competent authority for road augmentation and shall also have their consent to the implementation of components of the plan which involve the participation of these departments.

X. Human Health Issues:

- i. All workers working at the construction site and involved in loading, unloading, carriage of construction material and construction debris or working in any area with dust pollution shall be provided with dust mask.
- ii. For indoor air quality the ventilation provisions as per National Building Code of India.
- iii. Emergency preparedness plan based on the Hazard identification and Risk Assessment (HIRA) and Disaster Management Plan shall be implemented.
- iv. Provision shall be made for the housing of construction labour within the site with all necessary infrastructure and facilities such as fuel for cooking, mobile toilets, mobile STP, safe drinking water, medical health care, crèche etc. The housing may be in the form of temporary structures to be removed after the completion of the project.
- v. Occupational health surveillance of the workers shall be done on a regular basis.
- vi. A First Aid Room shall be provided in the project both during construction and operations of the project.

XI. Corporate Environment Responsibility:

- i. The project proponent shall comply with the provisions contained in this Ministry's OM vide F.No. 22-65/2017-1A.III dated 1st May 2018, as applicable, regarding Corporate Environment Responsibility.
- ii. The company shall have a well laid down environmental policy duly approved by the Board of Directors. The environmental policy should prescribe for standard operating procedures to have proper checks and balances and to bring into focus any infringements/deviation/violation of the environmental / forest / wildlife norms / conditions. The company shall have defined system of reporting infringements / deviation / violation of the environmental / forest / wildlife norms / conditions and / or shareholders / stake holders. The copy of the board resolution in this regard shall be submitted to the MoEF&CC as a part of six-monthly report.

[Handwritten signature]

[Handwritten signature]

[Handwritten signature]

- iii. A separate Environmental Cell both at the project and company head quarter level, with qualified personnel shall be set up under the control of senior Executive, who will directly to the head of the organization.
- iv. Action plan for implementing EMP and environmental conditions along with responsibility matrix of the company shall be prepared and shall be duly approved by competent authority. The year wise funds earmarked for environmental protection measures shall be kept in separate account and not to be diverted for any other purpose. Year wise progress of implementation of action plan shall be reported to the Ministry/Regional Office along with the Six Monthly Compliance Report.

XII. Miscellaneous:

- i. The project proponent shall prominently advertise it at least in two local newspapers of the District or State, of which one shall be in the vernacular language within seven days indicating that the project has been accorded environment clearance and the details of MoEF&CC/SEIAA website where it is displayed.
- ii. The copies of the environmental clearance shall be submitted by the project proponents to the Heads of local bodies, Panchayats and Municipal Bodies in addition to the relevant offices of the Government who in turn has to display the same for 30 days from the date of receipt.
- iii. The project proponent shall upload the status of compliance of the stipulated environment clearance conditions, including results of monitored data on their website and update the same on half-yearly basis.
- iv. The project proponent shall submit six-monthly reports on the status of the compliance of the stipulated environmental conditions on the website of the ministry of Environment, Forest and Climate Change at environment clearance portal.
- v. The project proponent shall submit the environmental statement for each financial year in Form-V to the concerned State Pollution Control Board as prescribed under the Environment (Protection) Rules, 1986, as amended subsequently and put on the website of the company.
- vi. The project proponent shall inform the Regional Office as well as the Ministry, the date of financial closure and final approval of the project by the concerned authorities, commencing the land development work and start of production operation by the project.
- vii. The project authorities must strictly adhere to the stipulations made by the State Pollution Control Board and the State Government.
- viii. The project proponent shall abide by all the commitments and recommendations made in the EIA/EMP report, commitment made during Public Hearing and also that during their presentation to the Expert Appraisal Committee.
- ix. No further expansion or modifications in the plant shall be carried out without prior approval of the Ministry of Environment, Forests and Climate Change (MoEF&CC).







- x. Concealing factual data or submission of false/fabricated data may result in revocation of this environmental clearance and attract action under the provisions of Environment (Protection) Act, 1986.
- xi. The Ministry / SEIAA / SEAC may revoke or suspend the clearance, if implementation of any of the above conditions is not satisfactory.
- xii. The Ministry / SEIAA / SEAC reserves the right to stipulate additional conditions if found necessary. The Company in a time bound manner shall implement these conditions.
- xiii. It shall be mandatory for the project management to submit six (06) monthly compliance report in respect of the stipulated prior Environmental Clearance terms and conditions in hard copies and soft copies to the regulatory authority concerned Regional Office of MoEF & CC at Ranchi and Jharkhand State Pollution Control Board (J.S.P.C.B.), Ranchi / CPCB as per direction contained in EIA Notification, 2006 and as amended vide OM No. J-11013/5/2009-IA.II dated : 29.06.2010, OM No. F.No.J-11013/5/2011-IA.I dated : 05.08.2011 and letter No. J-11013/71/2016-IA I(M) dated : 25.10.2017 of MoEF & CC, Govt. of India.
- xiv. The above conditions shall be enforced, inter-alia under the provisions of the Water (Prevention & Control of Pollution) Act, 1974, the Air (Prevention & Control of Pollution) Act, 1981, the Environment (Protection) Act, 1986, Hazardous and Other Wastes (Management and Transboundary Movement) Rules, 2016 and the Public Liability Insurance Act, 1991 along with their amendments and Rules and any other orders passed by the Hon'ble Supreme Court of India / High Courts and any other Court of Law relating to the subject matter.
- xv. The SEIAA, Jharkhand or any other competent Authority may alter modify the above conditions or stipulate any further condition in the interest of Environment Protection.
- xvi. Any appeal against this EC shall lie with the National Green Tribunal, if preferred, within a period of 30 days as prescribed under Section 16 of the National Green Tribunal Act, 2010.
- xvii. The Prescribed EC is valid as per Notification no. S.O. 1807(E) dated 12.04.2022 of MoEF & CC, Govt. of India.

Sd/-

Member Secretary
State Level Environment Impact
Assessment Authority, Jharkhand

Memo No. : EC/SEIAA/2025-26/3815/2025/ 488

Ranchi, Date : 06.11.2025

Copy to:


1. Secretary, Department of Forests, Environment & Climate Change, Govt. of Jharkhand.
2. Deputy Commissioner, District – Saraikela-Kharsawan, Jharkhand.
3. Divisional Forest Officer, Saraikela Forest Division, Saraikela, Jharkhand.

AS

D
/

Sp

4. Deputy Conservator of Forest & Field Director Elephant Project, Jamshedpur, Jharkhand.
5. Director, IA Division, Monitoring Cell, MoEF and Climate Change, Indira Paryavaran Bhavan, Jorbag Road, Aliganj, New Delhi – 110003.
6. Regional Office, Ministry of Environment, Forest and Climate Change, Govt. of India, 2nd Floor, Jharkhand State Housing Board (HQ), Harmu Chowk, Ranchi, Jharkhand – 834002.
7. Member Secretary, Jharkhand State Pollution Control Board, Ranchi.
8. Member Secretary, Jharkhand State Expert Appraisal Committee, Ranchi.
9. Website.
10. Guard file.

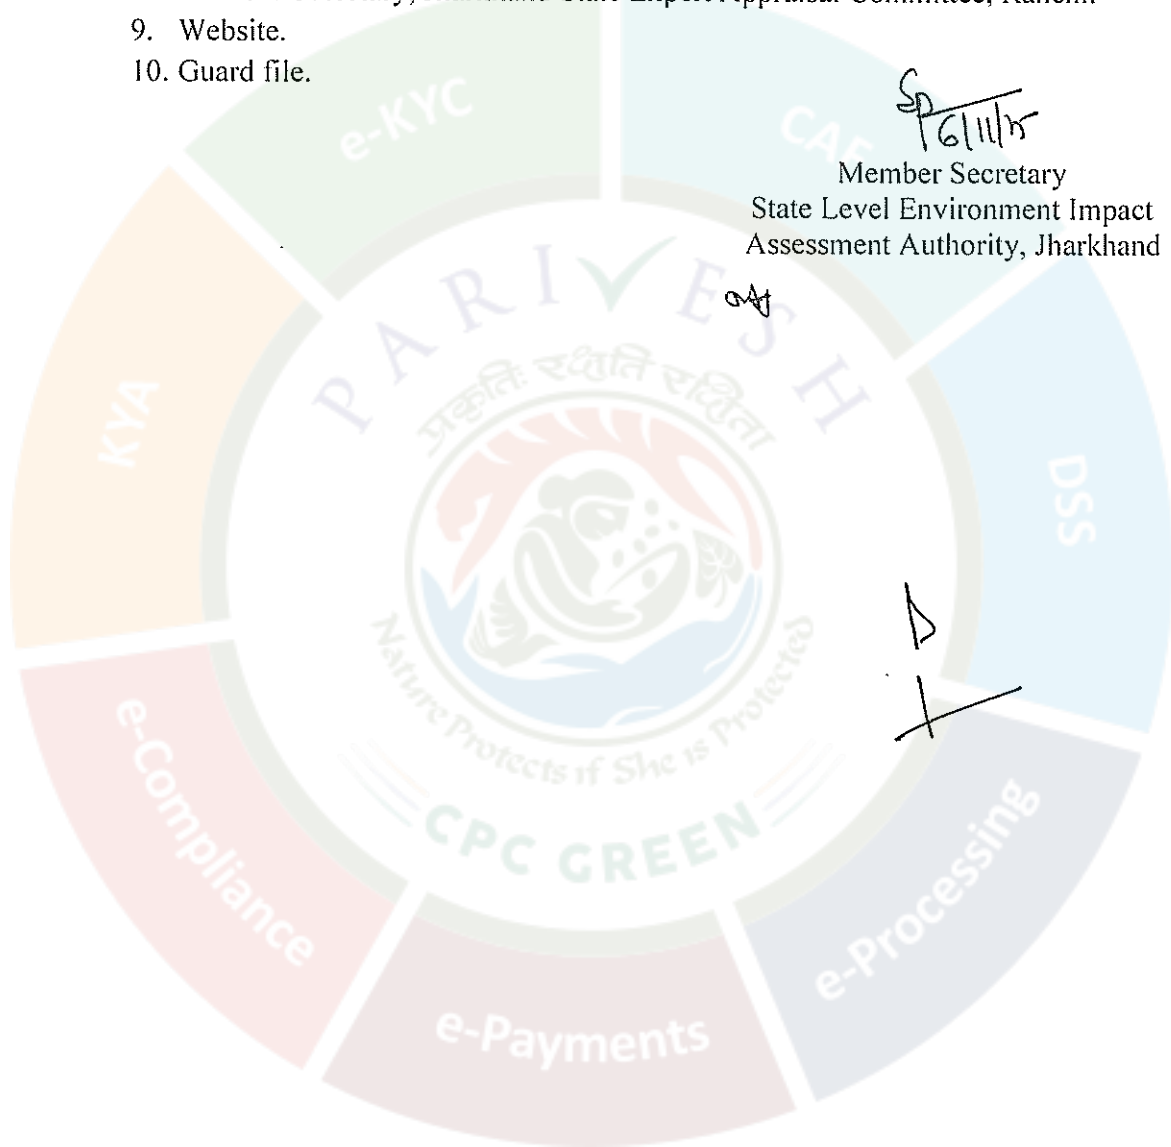

SP
16/11/25
Member Secretary
State Level Environment Impact
Assessment Authority, Jharkhand

